

# SeaShield Marine Systems



*LaGuardia Airport used the SeaShield Series 100 System to provide corrosion protection for over 2,000 steel piles.*

## Series 100

**Pile protection system with Premtape Marine and an HDPE outercover secured with a strapping system**


**S**eaShield Series 100 System provides splash zone protection for steel, concrete and wood structures. The system is ideal for environments where conditions are too severe for paint systems, epoxies and other conventional forms of protection. SeaShield Series 100 seals out oxygen and water, effectively stopping corrosion on metal surfaces. The system also prevents spalling and corrosion of steel reinforcement in concrete piles.

The Series 100 encapsulates wharf piles, riser pipes and exposed piping in splash and intertidal zones. It accommodates piles with cylindrical and H-Pile configurations, as well as support members, bracing, brackets and other irregular surfaces.

### Features

- Minimal surface preparation required (*no abrasive blasting*)
- Fast and easy installation
- One piece jackets
- High impact resistance in aggressive environments
- UV resistant
- Safe to apply and environmentally responsible
- Long maintenance-free service life



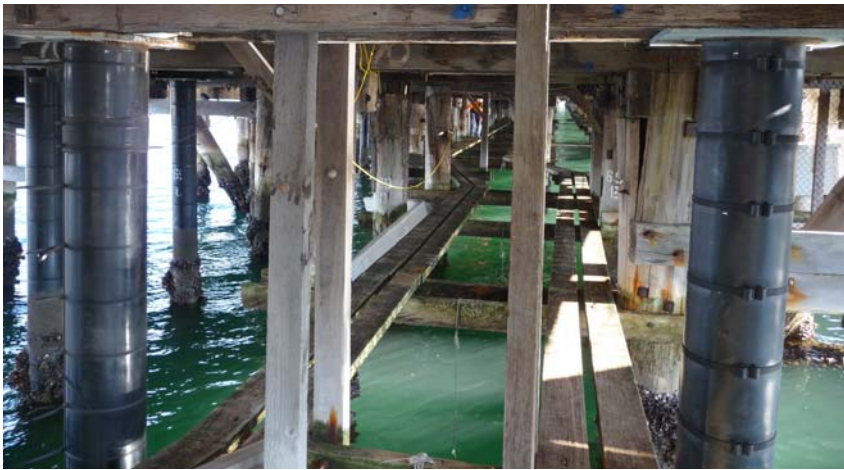

▲ The components of the Series 100 System can be applied under water with minimal surface preparation. ▼




## Materials

The SeaShield Series 100 System stops corrosion by using a proven petrolatum-based tape. The Premtape Marine forms an anti-corrosion membrane by displacing water and forming a moisture-resistant bond. A tough outercover surrounds this component to protect against weathering and mechanical damage.

### Prempaste S105

Underwater petrolatum paste containing water displacing, corrosion inhibiting and flow control additives. It does not contain volatile organic components. It is applied to badly corroded and pitted steel above and below water prior to the application of the tape. It displaces water and fills pits and depressions.

### Premier Molding Compound (optional)

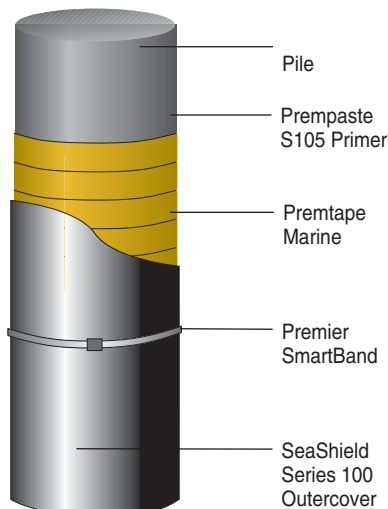

A flexible, putty-like caulking and filler material used to seal irregular shapes and other areas where tape may bridge. Common applications include pile/pilecap interfaces, brackets and flanges. Mastic seals against water and air intrusion and improves contours for tape wrapping.

### Premtape Marine

Synthetic fiber-reinforced tape impregnated and coated with a specially formulated, petrolatum-based compound containing inert fillers, water displacing agents and backed with a thin HDPE backing. The tape provides a long-lasting, anti-corrosion membrane for steel and concrete surfaces. Applied spirally, and with sufficient tension, Premtape Marine displaces water and develops a water resistant bond. It provides the primary corrosion protection in the SeaShield Series 100 System.

### SeaShield Outercover

A tough, ultraviolet-resistant outercover that provides mechanical protection against the elements and accidental impact. The size of the outercover and thickness of the jacket are customized to meet application requirements. SeaShield outercovers are secured by Premier SmartBand strapping system for the intended environment. The outercover can be easily removed for periodic inspections of the SeaShield system and substrate.

## Find Out More

For further details please refer to the Engineering Specifications for SeaShield Series 100 or call 1-888-821-2300.

premier  
COATINGS LTD

**HOUSTON:**  
9747 Whithorn Drive,  
Houston, Texas,  
U.S.A. 77095  
Tel: 1-281-821-3355  
Fax: 1-281-821-0304

**TORONTO:**  
90 Ironside Crescent,  
Unit 12, Toronto,  
Ontario, Canada M1X1M3  
Tel: 1-416-291-3435  
Fax: 1-416-291-0898

e-mail: [info@premiercoatings.com](mailto:info@premiercoatings.com)

[www.premiercoatings.com](http://www.premiercoatings.com)

A Member of Winn & Coales International



# Engineering Specifications for **SeaShield Series 100** Steel, Concrete and Timber Pile Protection

## 1.0 Scope

- 1.1 This specification may be used for the materials and application of Premier SeaShield Series 100 for protection of steel, concrete and timber piles.
- 1.2 The Engineer shall select appropriate sections of the specification to insure that the specification is comprehensive for specified work.

## 2.0 General Requirements

- 2.1 Contractor shall comply with all written recommendations of the manufacturer regarding application of the specified system.
- 2.2 The manufacturer of specified materials shall be Premier Coatings Ltd., 9747 Whithorn Drive, Houston, TX 77095, Telephone: 281-821-3355 or 90 Ironside Crescent Unit 12, Toronto, Ontario, Canada M1X1M3 Telephone: 416-291-3435.  
E-mail: info@premiercoatings.com

## 3.0 Materials

- 3.1 Premipaste S105 Primer
  - 3.1.1 The Premipaste S105 Primer shall be comprised of saturated petroleum hydrocarbons (petrolatum), inert fillers and passivating agents.
  - 3.1.2 The primer is used to displace moisture, passivate surface oxides and fill surface imperfections.
  - 3.1.3 The Premipaste S105 Primer shall meet the physical specification values listed on the specification sheet.
- 3.2 Premier Molding Compound
  - 3.2.1 The Premier Molding Compound shall be comprised of saturated petroleum hydrocarbons (petrolatum), inert fillers, reinforcing fibers and thermal extenders. Variations may contain beads of cellular polymer and flow control additives.
  - 3.2.2 Premier Molding Compound shall be cold applied self supporting Mastic for molding around irregular shaped fittings to provide a suitable profile for applying the Premitape Marine.
  - 3.2.3 The physical specification values shall meet the values given on the specification sheet for the type of Premier Molding Compound required.
- 3.3 Premitape Marine
  - 3.3.1 The Premitape Marine shall be comprised of a non-woven synthetic fabric carrier fully impregnated and coated with a neutral petrolatum based compound with inert siliceous fillers, inhibitors and backed with a thin HDPE backing.

3.3.2 The Premitape Marine shall have a character stable in composition and plasticity over a wide temperature range. The tape shall be non-hardening and non-cracking. The tape shall accommodate vibration and extreme movement of substrate. Superficial oxidation renders surface less tacky. Highly resistant to mineral acids and alkalies.

3.3.3 The Premitape Marine shall meet the physical specifications values listed on the specification sheet.

## 3.4 SeaShield Outercover

3.4.1 The SeaShield Outercover shall be comprised of High Density Polyethylene (HDPE), Ethylene Propylene Diene Terpolymer Reinforced (EPDM-R). It shall be new, seamless virgin material. Use of reprocessed resin is prohibited. The sheet shall be uniform throughout, free from dirt, oil and other foreign matter and free from cracks, creases, wrinkles, bubbles, pin holes and any other defects that may affect its service.

3.4.2 The Outercover shall be of a thickness necessary to prevent damage to underlying tape coating. It shall be custom sized according to length of desired protection and width of circumference of pile.

3.4.3 Physical properties of the outercover shall meet or exceed the minimum requirements of the attached product specifications for the SeaShield Outercover.

## 3.5 SeaShield Edge Strip (for Steel & Concrete)

3.5.1 The SeaShield Edge Strip shall be comprised of a rigid plastic and be fastened to the outside edge of the SeaShield Outercover when deemed necessary to prevent marine growth in the overlap between the straps.

## 3.6 Strapping Systems

3.6.1 The strapping and buckles shall be Premier SmartBand.

3.6.2 A stopper band may be required depending on size of pile.

## 3.7 SeaShield Foam Blocks for H-Piles (Note: Not to be used with cylindrical piles)

3.7.1 The SeaShield Foam Blocks shall be comprised of polyether polyurethane foam.

3.7.2 The foam blocks shall be wrapped with Premitape Marine using a 1" (25 mm) overlap.



#### 4.0 General Surface Preparation Requirements

- 4.1 Remove weld spatter, sharp points and edges.
- 4.2 Remove marine growth, loose rust, paint and foreign matter by hand and /or power tools cleaning in accordance with SSPC-SP-2, or SP-3, "Hand Tool Cleaning" or "Power Tool Cleaning" respectively.
- 4.3 A hydraulic whirl away or high pressure water blasting may be used to prepare the surface.

#### 5.0 Application of Prempaste S105 Primer

- 5.1 Apply Prempaste S105 Primer by hand, brush, glove, rag or roller.
- 5.2 Apply a thin uniform film over the entire surface to be wrapped with Prempaste Marine. (Note: When applying underwater the primer will be less visible on the pile.)

#### 6.0 Application of Premier Mastics

- 6.1 To protect complex surfaces and configurations such as brackets, flanges, valves, etc., apply Premier Molding Compound or Prembond Mastic by filling and packing to achieve a uniform contour to which tape can be applied without bridging or voids.
- 6.2 Use Premier Molding Compound to fill in cavities at the pile/pile cap interfaces.

#### 7.0 Application of Prempaste Marine to a Cylindrical Pile

- 7.1 The Prempaste Marine shall be spirally wrapped onto pile using a 55% overlap which will provide a double thickness of tape throughout. Application shall proceed at the designated low point of the area and proceed upward to the high point creating a weatherboard effect.
- 7.2 Hold end of the tape firmly against the starting point and firmly press on the surface. Unroll the tape, keeping the roll close to the surface. Do not get a long lead of tape as it will tend to fold and gap on the surface being wrapped.
- 7.3 Apply sufficient tension to provide continuous adhesion, but do not stretch the tape. As application proceeds, press out all folds and air pockets that may occur.
- 7.4 Maintain a minimum 6" (152 mm) overlap when overlapping one roll with the end of a new roll.
- 7.5 At the completion of each roll, smooth the overlaps by hand in the direction of the spiral to insure sealing of the overlap.

#### 8.0 Application of SeaShield Foam Blocks and Prempaste Marine for H-Piles

- 8.1 Insert the wrapped foam blocks into the openings of the H-Piles on each side, ensuring a tight fit.
- 8.2 The Prempaste Marine shall be spirally wrapped around the H-Pile using a 55% overlap, which will provide a double thickness of tape throughout. Application shall proceed at the designated low point of the area and proceed upward to the high point creating a weatherboard effect.
- 8.3 Hold end of the tape firmly against the starting point and firmly press on the surface. Unroll the tape, keeping the roll close to the surface. Do not get a long lead of tape, as it will tend to fold and gap on the surface being wrapped.

- 8.4 Apply sufficient tension to provide continuous adhesion, but do not stretch the tape. As application proceeds, press out all folds and air pockets that may occur.
- 8.5 Maintain a minimum 6" (152 mm) overlap when overlapping one roll with the end of a new roll.
- 8.6 At the completion of each roll, smooth the overlaps by hand in the direction of the spiral to insure sealing of the overlap.

#### 9.0 Application of SeaShield Outercover to a Cylindrical Pile

- 9.1 Outercover should be custom fabricated to the required diameter and length of the pile.
- 9.2 Locate the outercover between the elevations indicated in the specifications and drawings.
- 9.3 Wrap the outercover around the pile with the edge seal strip on the outside of the outercover. A minimum overlap of 3 inches (76 mm) shall be achieved with tension being applied to form a tight sheath around the pile.
- 9.4 A strap shall be placed and hand tightened at the water level to ensure a level overlap at the top and bottom of the outercover.
- 9.5 The top and bottom straps shall be approximately 3" from edge of the outercover (see drawing for details). Additional straps shall be placed equal distance on center from top to bottom. Spacing of straps shall be 10" (254 mm).

#### 10.0 Application of SeaShield Outercover to an H-Pile

- 10.1 The outercover should be custom fabricated to the required height, width & length of the H-Pile.
- 10.2 Locate the outercover between the elevations indicated in the specifications and drawings.
- 10.3 Wrap the outercover around the pile with the edge strip on the outside of the outercover. A minimum overlap of 3 inches (76 mm) shall be achieved with tension being applied to form a tight sheath around the pile.
- 10.4 A strap shall be placed and hand tightened at the water level to ensure a level overlap at the top and bottom of the outercover.
- 10.5 The top and bottom straps shall be approximately 1" (25 mm) from edge of the outercover (see drawing for details). Additional straps shall be placed equal distance on center from top to bottom. Spacing of straps shall be 10"-12" (254 - 305 mm) depending on the type of strap and environment.




**HOUSTON:**  
9747 Whithorn Drive,  
Houston, Texas,  
U.S.A. 77095  
Tel: 1-281-821-3355  
Fax: 1-281-821-0304

**TORONTO:**  
90 Ironside Crescent,  
Unit 12, Toronto,  
Ontario, Canada M1X1M3  
Tel: 1-416-291-3435  
Fax: 1-416-291-0898

e-mail: [info@premiercoatings.com](mailto:info@premiercoatings.com)  
[www.premiercoatings.com](http://www.premiercoatings.com)

**A Member of Winn & Coales International**

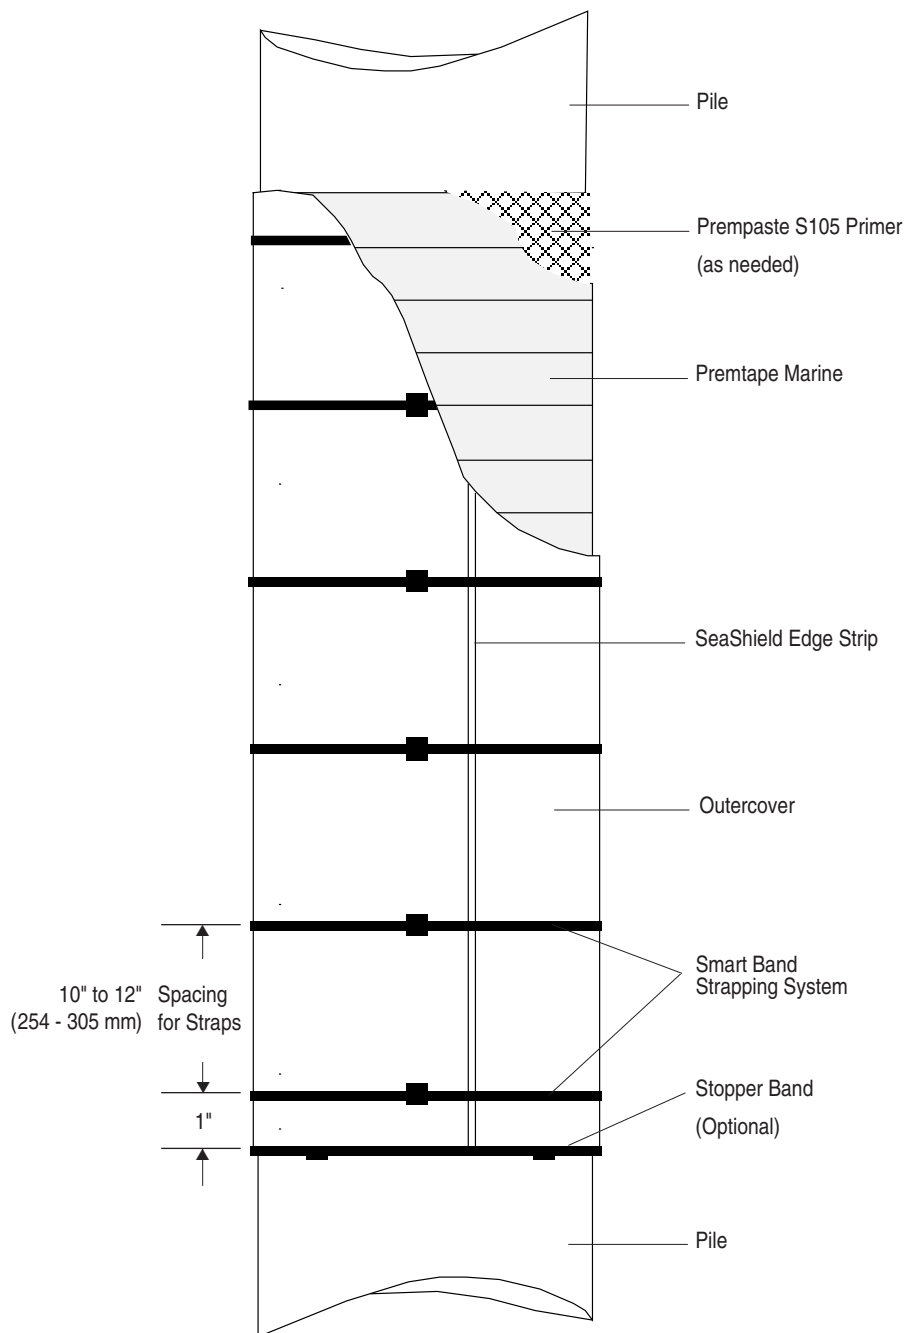

**Elevation View**

**Sheet 1**  
(Not to Scale)

**SeaShield Series 100  
Splashzone Protection System**

