

SeaShield Marine Systems



The SeaShield Series 400 System has been independently tested by Texas A&M University, Department of Civil Engineering, Structural and Materials Testing Laboratory.



Series 400

Structural repair system that doubles the strength of the original timber pile

SeaShield Series 400 System is comprised of the SeaShield Fiber-Form Jacket, C-GRID® 450 and SeaShield 510 UW Grout or SeaShield 550 Epoxy Grout. The Series 400 is a revolutionary encapsulation system that not only protects timber piles from aggressive saltwater environments and marine borers, but also strengthens deteriorated piles with a durable, lightweight and non-corrosive reinforcement.

Features

- Provides double the strength of the original timber pile
- Non-corrosive reinforcement
- Reduced weight when compared to steel reinforcement
- Requires inexpensive pumping equipment
- Flowable non-shrink grout
- Manufactured to be translucent with clear gel coat
- High impact resistance
- UV resistant
- Long maintenance-free service life

premier
COATINGS LTD



The lightweight and non-corrosive C-GRID® 450 is installed around the pile.



The SeaShield Fiber-Form jacket is then snapped in place around the C-GRID® 450.



Grout can be pumped as soon as the SeaShield Fiber-Form jacket is secured in place.

SeaShield Series 400 System

The SeaShield Series 400 System is comprised of a SeaShield Fiber-Form Jacket, C-GRID® 450, and either SeaShield 510 UW Grout or SeaShield 550 Epoxy Grout. The complete system doubles the strength of the original timber pile.


The C-GRID® 450 should be unrolled and cut using tin snips or other suitable method. The cut width of C-GRID® 450 is determined by including enough material to be imbedded within the grout and a 6" overlap along vertical seam. Locate the C-GRID® 450 between the elevations indicated in the specification and drawings. Then, the SeaShield Fiber-Form Jacket is installed around the pile and C-GRID® 450. A foam seal should be installed at the bottom of each jacket to prevent any grout from leaching out of the bottom of the jacket during

installation. Once jacket is in place, inject grout approximately 6" to 12" into the bottom port and allow it to cure before proceeding with subsequent lifts. The injection process should be continuous, except when the injection hose is moved from port to port.

For further information please refer to the technical data sheets for the SeaShield Fiber-Form Jacket, C-GRID® 450 and SeaShield 510 UW Grout or SeaShield 550 Epoxy Grout. Complete details can be found on the SeaShield Series 400 Engineering Specifications.

C-GRID® 450 utilized by Premier Coatings Ltd. in the SeaShield Series 400 System is protected under the following US and European Patents: 6,263,629; 5836,715; 6,123,879; 6,454,889; 6,632,309; 0861353; 1094171.

C-GRID is registered trademark of Chomarat North America, LLC.

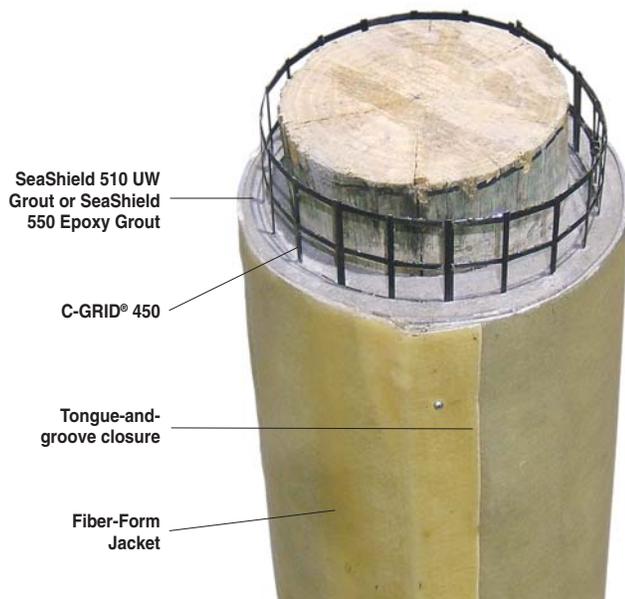

SeaShield 510 UW
Grout or SeaShield
550 Epoxy Grout

C-GRID® 450

Tongue-and-
groove closure

Fiber-Form
Jacket

premier
COATINGS LTD

HOUSTON:
9747 Whithorn Drive,
Houston, Texas,
U.S.A. 77095
Tel: 1-281-821-3355
Fax: 1-281-821-0304

TORONTO:
90 Ironside Crescent,
Unit 12, Toronto,
Ontario, Canada M1X1M3
Tel: 1-416-291-3435
Fax: 1-416-291-0898

e-mail: info@premiercoatings.com

www.premiercoatings.com

A Member of Winn & Coales International